

6. CORRUGATED METAL GASKETS

PROPERTIES AND APPLICATION

The TESNILA TIT corrugated metal gaskets have been proven to be both reliable and cost-effective for the application on flanges and heads where bolt loading is sufficient. Their operation principle is based on different degrees of hardness of adjacent materials. The sealing effect is produced by the constant load to which a gasket is exposed. They are used in applications, which require mechanical strength, thermal conductivity, as well as temperature and corrosion resistivity. They can be classified into flat, serrated and corrugated types, and are particularly useful when compressibility is not a factor and where sufficient clamping force is available. Metal gaskets feature greater mechanical strength, better heat transfer and resistance to higher temperatures and pressures, and can offer advantages over the clad type gaskets in certain applications.

The TESNILA TIT corrugated metal gaskets with soft layer on both sides are used in low-pressure applications in large diameter flue gas ducts at high temperatures. The use of corrugated gaskets eliminates the problem of difficult handling with large non-metal gaskets used in those applications.


They are suitable for gas pipes and valve caps, or wherever acids, oils and chemicals are found. They can be used at lower pressures and higher temperatures.

ADVANTAGES

- Outstanding mechanical strength and thermal conductivity
- Capable of withstanding high temperatures
- There are almost no limitations regarding size
- Solid construction provides stability even for large diameters and ensures trouble-free handling and installation

SHAPE AND CONSTRUCTION

The TESNILA TIT metal gaskets are produced in several types to meet the most demanding applications. Shapes: Round, Oval, Rectangular, etc.

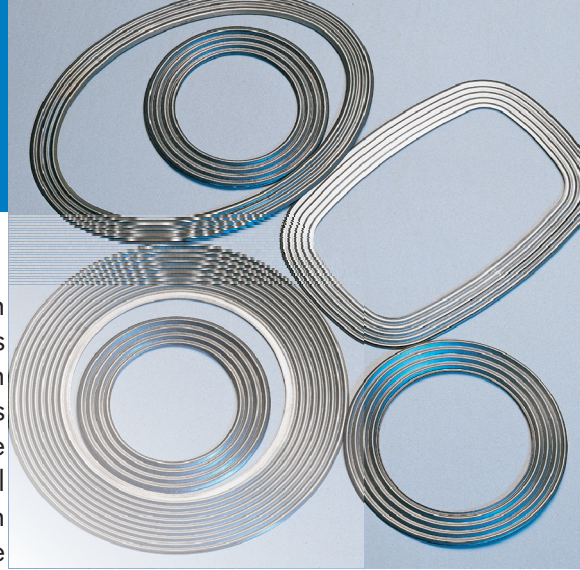

MW1



MW12A



MW12AE



MW13A




MW22A



MW23A



MW12C




MATERIALS FOR METAL AND CORRUGATED METAL GASKETS		
Material	ASTM	DIN Material No.
Low Carbon Steel	Soft iron	1.1003
Stainless steel	AISI 304	1.4301
Stainless steel	AISI 316	1.4401
Stainless steel	AISI 321	1.4541
Stainless steel	AISI 316 Ti	1.4571

Metal gaskets

There are different types of metal gaskets, like flat, groove, tongue and sectional ones. They are used where compressibility (elasticity) of sealing material is not required. The construction of such gaskets based on the principle of different hardness of adjacent materials. These gaskets come in various shapes and there are almost no limits concerning their size.

6. CORRUGATED METAL GASKETS

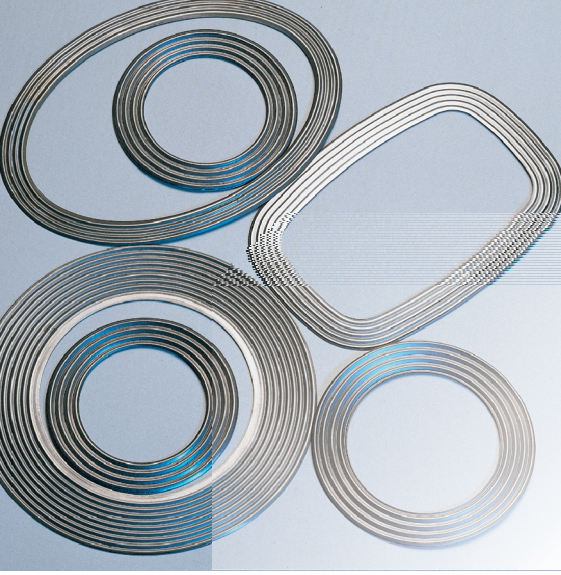

Corrugated gaskets

Corrugated metal is covered with graphite, ceramic or PTFE layers. An additional finishing layer is applied depending on the requirements of the medium to be sealed. Such gaskets are used on uneven or distorted sealing surfaces, where more elastic materials with better sealing performance are needed.

SIZE

Metal gaskets

The gasket constructions with an external diameter 1000 mm is usually made in one piece, larger dimensions are welded. Welding is also recommended for cost-effectiveness.

Corrugated gaskets

The metal is 0,5 mm thick and the corrugation pitch is 3mm, 4mm or 6mm depending on the width of the gaskets. The thickness of corrugation is approx. 1mm to 1,5mm, depending on gasket size. Corrugated metal is covered with graphite, grafilit SF, SL, SP, ceramic or PTFE layers in thickness 0,5mm, 1 mm or 1,5 mm.

GASKET ORDERING EXAMPLE:

STANDARD SIZE:

CORRUGATED GASKET M12A,
EN1514-4 DN100, PN40,
Material: 1.4571/Graphite

NON-STANDARD DIMENSION:

Corrugated gasket M12A,
OD=946mm, ID=914mm, s=3,5mm,
Material: AISI 316 TI/Graphite